

**PRODUCT DETAILS**

PRODUCT CODE	<b>NS60RS</b>
WARRANTY	30 months (Private Passenger Use) *
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery
GROUP SIZE	NS60
CASE AND LID	Material : Polypropylene (PP)
	Handle : 1 pc Plastic
	Ledges : No Ledge (NL)
	Venting : Centralized system with
	System : Degassing vents on sides



**DIMENSIONS, WEIGHT, AND LAYOUT**


OVERALL DIMENSIONS	METRIC
LENGTH, mm	236
WIDTH, mm	128
CASE HEIGHT, mm	200
TOTAL HEIGHT, mm	220
APPROXIMATE WEIGHT, kg	11.79

TERMINAL DATA	METRIC
TYPE	SAE
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	D (Positive Left)

**CAPACITY SPECIFICATIONS**

COLD CRANKING AMPS (CCA)	450 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	48 Ah
RESERVE CAPACITY (RC)	75 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

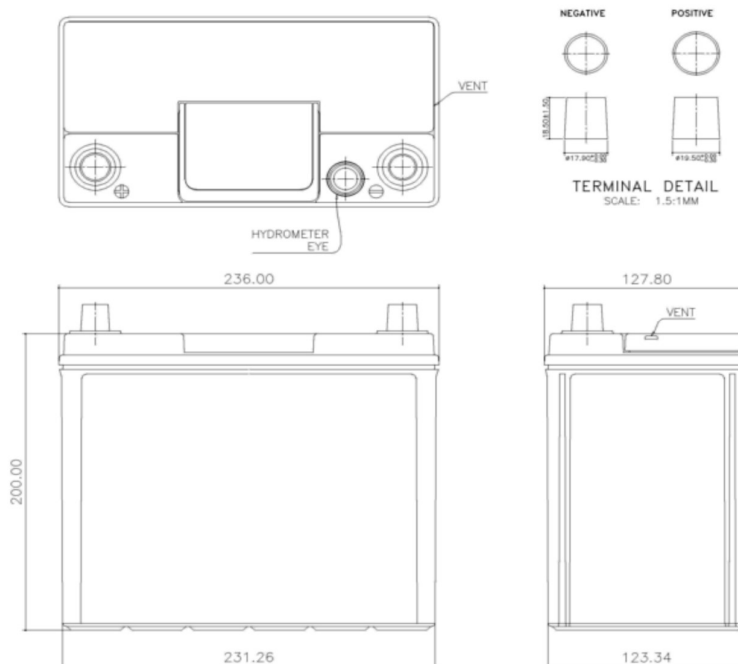

\*Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.